






In LOCK

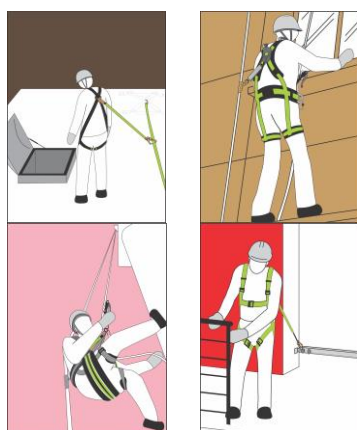

HS CODE
83081000
CARTON SIZE / PCS.
60 x 40 x 24 cm / 30
AET (CE) N° 16-0103
DOLOMITICERT, n°2008 Zona Industriale Villanova 32013 LONGARONE (BL) - Italia
MODULE D 11 IN14/14003
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

REF.	FA 60 018 00
CE	EN 795:2012 Type B
	x1
MAT.	
R (kN) / MBS (kN)	12 kN / 15 kN
	--- Ø 18-19 mm x 110 mm (concrete)
	0.15 KG




R (kN) / MBS (kN)

Nombre d'utilisateurs
Number of users
Cantidad de usuarios
Quantità di utilizzatori
Anzahl der Benutzer

Résistance statique (en kN) / Résistance à la rupture
Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
Resistenza statica (in kN) / Resistenza alla rottura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)

(concrete)



Béton
Concrete
Hormigón
Concreto
Beton

Fixations à utiliser / Dimensions de la structure d'accueil
Fasteners to use / Dimensiosn of the receiving structure
Fijaciones que deben usarse / Dimensiosnes de la estructura receptora
Elemneti di fissaggio da utilizzare / Dimensioni della struttura ospitante
Zu verwendende Befestigungen / Abmessungen der Aufnahmestruktur